


AERODROME
CHART - ICAO

ARP
N59°48.0'
E030°15.8'

ELEV
24.1m

SANKT-PETERBURG, RUSSIA
PULKOVO

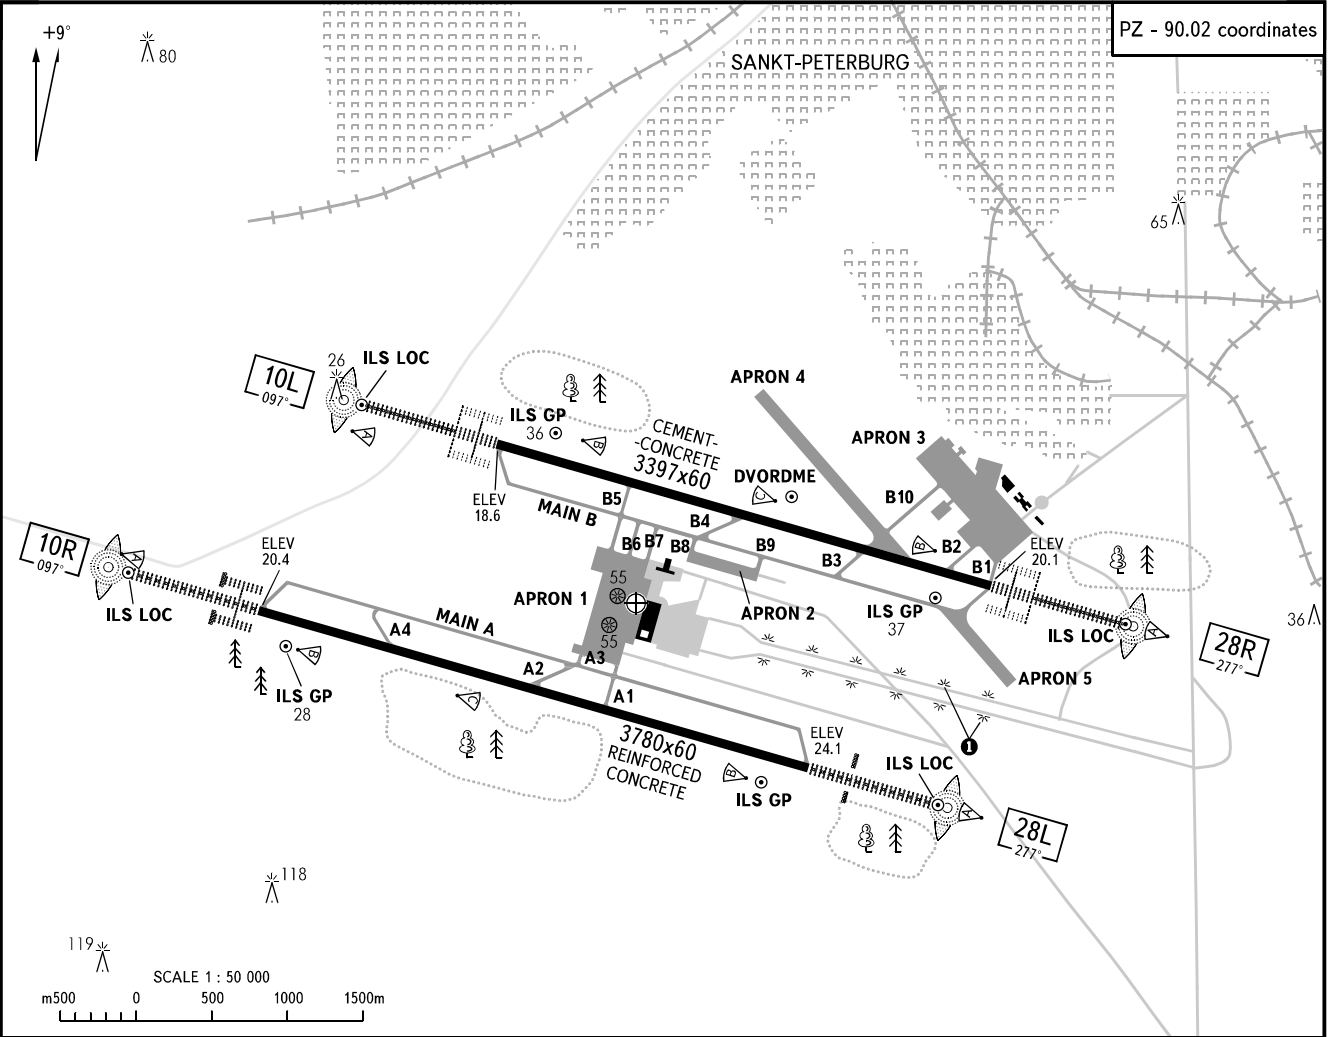

TOWER

RWY 10L/28R

118.1

TAXIING

APN 1, 2, 5

121.7

APN 3, 4

121.9

1

 Brightly lit highway should not be confused with parallel RWY.

GENERAL

RWY 10R is approved for CAT II operation, ACFT and crew's certification is required.

RWY 10L/28R is approved for CAT I, II, III operation, ACFT and crew's certification is required.

AERODROME LIGHTING	RWY	DIRECTION (TRUE)	THR	BEARING STRENGTH
Approach: RWY 10L/28R, 10R/28L - HIALS	10R	106°23'	N59 47 59.70 E030 13 06.00	PCN 68 /R/B/W/T
	28L	286°26'	N59 47 25.17 E030 16 58.48	
Runway: Edge-white, last 600m yellow HIRL	10L	106°26'	N59 48 35.08 E030 14 43.45	PCN 83 /R/C/W/T
	28R	286°29'	N59 48 03.96 E030 18 12.42	
Threshold: Green				

ELEVATIONS AND
DIMENSIONS IN
METRES, BEARINGS
ARE MAGNETIC